

Standard Packages

Unit Width	Slide Opening	Breakout Opening	Fast Slide Panel Width	Slow Slide Panel Width	Sidelite Width
7'-0" (2134)	3'- 7 1/2" (1105)	6'-1" (1854)	2'- 3 3/4" (705)	2'- 3 1/4" (692)	2'- 6 1/2" (692)
8'-0" (2438)	4'- 3 1/2" (1308)	7'-1" (2159)	2'- 7 3/4" (806)	2'- 7 1/4" (793)	2'-10 1/2" (793)
9'-0" (2743)	4'-11 1/2" (1511)	8'-1" (2464)	2'-11 3/4" (908)	2'-11 1/4" (895)	3'- 2 1/2" (978)
10'-0" (3048)	5'- 7 1/2" (1715)	9'-1" (2769)	3'- 3 3/4" (1010)	3'- 3 1/4" (997)	3'- 6 1/2" (1079)
12'-0" (3658)	6'-11 1/2" (2121)	11'-1" (3099)	3'-11 3/4" (1213)	3'-11 1/4" (1200)	4'- 2 1/2" (1282)

Unit Height: 7'-6" (2286) **Rough Opening Height:** 7'-6 1/4" (2292)
Rough Opening Width = Unit Width + 1/2" (13)
Glazing: Standard unit prep'd for 1/4" (6) glass. Glass by others.

Anodized Finish:
Clear or Dark Bronze



Options

- Custom unit widths between 7'-0" & 12'-0".
- Custom mid-rails, bottom rails and jambs.
- Transom.
- Medium or wide stile construction (slide opening will be reduced).
- Custom anodized or paint finish or stainless steel cladding

See details for options starting on p. A5.0 and Architectural Specifications on p. A7.7.

Installation and Operation

- Door perimeter mounted within rough opening with 1/4" minimum shim space at header & jambs. Finish floor not to exceed 1/4" out of level. (See page A.3)
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service to each unit on dedicated 20 amp circuit breaker routed to header. Current draw is 3.15 amps (Max.).
- Door actuated with header mounted motion sensor at interior and exterior for detection of traffic in each direction. Door closes after time delay expires. (See page A.4)
- Manual Locking: Exterior keylock and interior thumbturn provided at vertical strike rail. (Optional fail-safe or fail-secure autolock)
- SX panels can breakout 90° from any position of slide movement with max. 50 lbf. of force at lock stile.

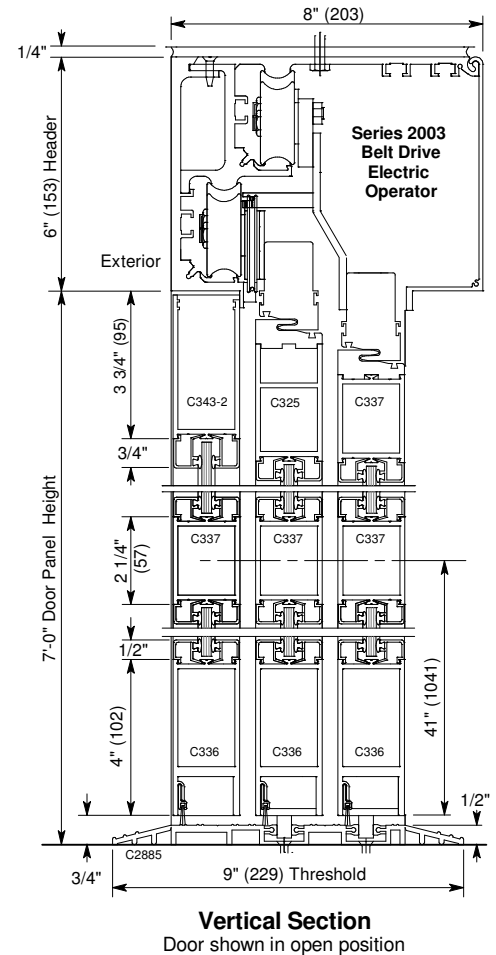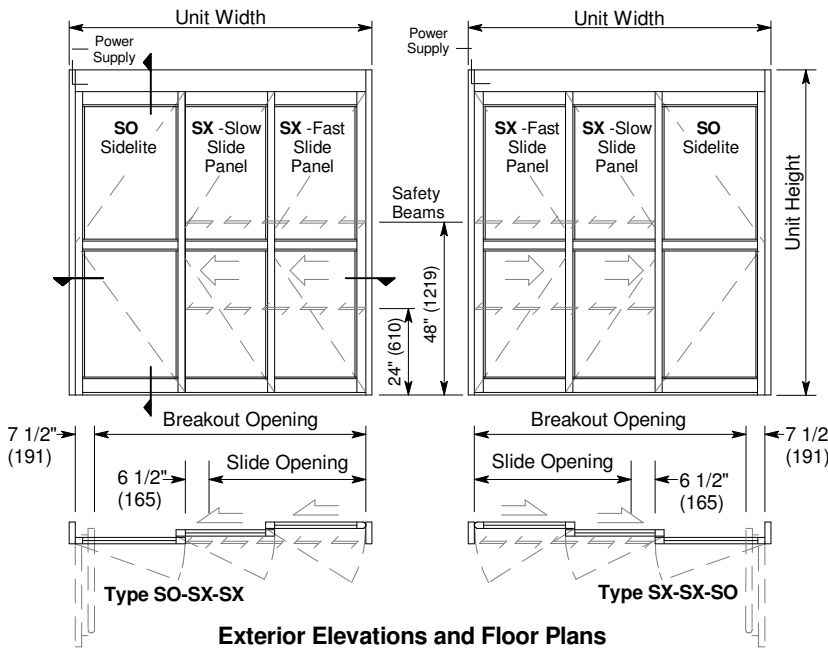

Horizontal Section

Type SO-SX-SX shown, SX-SX-SO opposite

