



4242 Baldwin Boulevard  
 Corpus Christi, Texas  
 USA 78405-3399  
 Tel: 800-531-3111, 361-888-5591  
 Fax: 800-531-3108, 361-888-6510  
 www.hortondoors.com  
 The Automatic Choice

# ARCHITECTURAL DETAILS

## AUTOMATIC COMMERCIAL SLIDE DOORS

HD-Slide® Series 2500 Elegant®

A4.22

Type: 310 Biparting SO-SX-SX-SO with Panic Device



Feb 2018

### Standard Packages

Unit Width	Slide Opening	Breakout Opening	Slide Panel Width	Sidelite Width	Rough Opening Width
12'-0" (3658)	5'-0" (1524)	10'-9 1/2" (3289)	3'-0" (914)	3'-0 3/4" (933)	12'-0 1/2" (3670)
14'-0" (4267)	6'-0" (1829)	12'-9 1/4" (3899)	3'-6" (1067)	3'-6 3/4" (1086)	14'-0 1/2" (4280)
<b>Unit Height:</b> 7'-8" (2337)		<b>Rough Opening Height:</b> 7'-8 1/4" (2343)		<b>Anodized Finish:</b> Clear or Dark Bronze	
<b>Glazing:</b> Standard unit provided with 1/2" (13) clear tempered glass.					
<b>Threshold:</b> 1/2" (13) tall x 4" (102) wide (See page A5.3).					

### Installation and Operation

- Door perimeter mounted within rough opening with 1/4" minimum shim space at header and jambs. Finish floor not to exceed 1/4" out of level. (See page A.3)
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each unit on dedicated 20 amp circuit breaker routed to header. Maximum current draw is 3.15 amps.
- Door actuated with header mounted motion sensor at interior and exterior for detection of traffic in each direction. Door closes after time delay expires. (See page A.4)

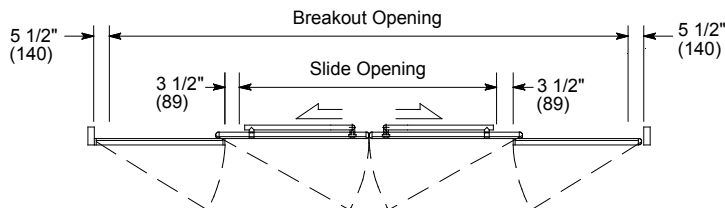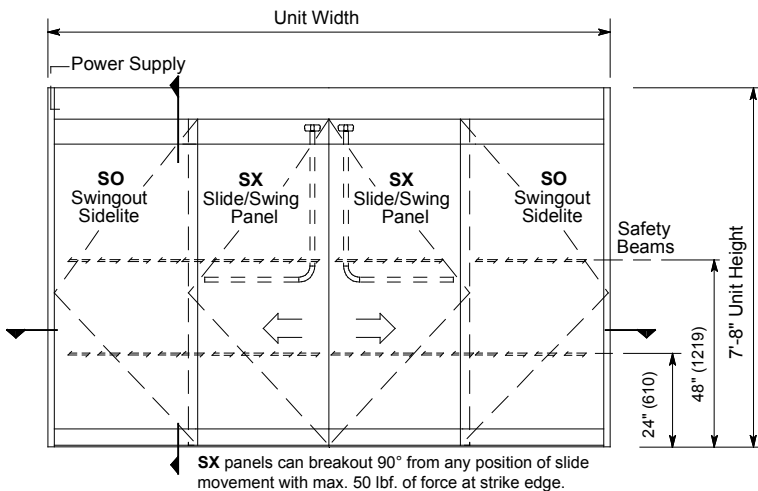

Exterior Elevation and Floor Plan

