

Two-Way

Visdom ELITE®

Anti-Piggyback / Anti-Tailgate Security System



The Visdom Elite Security System Provides Unparalleled Performance

The Visdom Elite detects unauthorized entry violations such as piggybacking and tailgating. The system goes beyond existing vision-based, weight-based, infrared and ultrasonic systems, actually discerning the difference between true violations and everyday authorized personnel – such as a person with a parcel or heavy clothing which other systems often detect inaccurately. Visdom Elite is the most intelligent security detection sensor on the market today – and the most reliable.

Additional benefits include:

- Easily retrofits onto existing Horton security revolving doors
- Immune to shadows, reflections and environmental changes
- Versatile X or + configuration
- Continuous flow from both directions simultaneously
- Superior aesthetics with mat-less design



Round Canopy
Round Drum



Round Canopy
Segmented Drum



Segmented Canopy
Segmented Drum



Specify Horton and demand AAADM certified installation



Security Revolving Door Systems



Two-Way Visdom ELITE®

Anti-Piggyback / Anti-Tailgate Security System

Visdom Elite prevents two users from entering or exiting on a single presentation. The system provides data log with date and adjusts to meet security requirements.


Installation

Flexible Security Levels

The Visdom Elite can be tailored to meet the level of security you require with several modes of operation such as card in-card out, card in-free exit and can communicate with card reader systems utilizing an anti-pass back feature. The Visdom Elite sensor interacts with Horton Automatics ControlFlow security revolving door control to keep would-be violators out of the restricted area, yet provide ease of access to valid users.

Easy To Install


Visdom Elite installs easily on new or existing door systems and does not require special mounting. The system is a compact, self-contained "People Counter" that includes all hardware in a single box. It mounts into the canopy of revolving doors at standard ceiling heights.

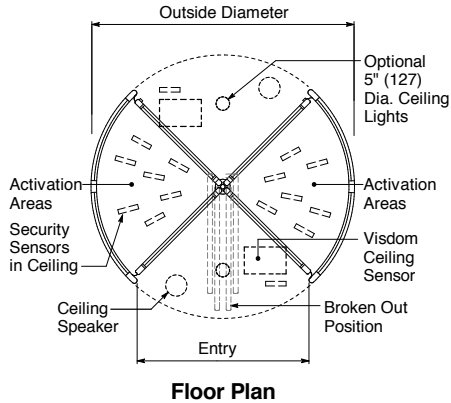

Floor Plan

Round Drum

Nominal Inside Diameter	Outside Diameter	Canopy Diameter	Entry	Rough Opening Width (at Canopy) x Height
6' 0" (1830)	6' 3 1/2" (1920)	6' 4" (1930)	3' 10 7/8" (1191)	6' 4 1/2" (1943) x 8' 1/4" (2445)
6' 6" (1981)	6' 9 1/2" (2070)	6' 10" (2083)	4' 3 1/8" (1299)	6' 10 1/2" (2096) x 8' 1/4" (2445)
7' 0" (2134)	7' 3 1/2" (2223)	7' 4" (1930)	4' 7 3/8" (1406)	7' 4 1/2" (2248) x 8' 1/4" (2445)

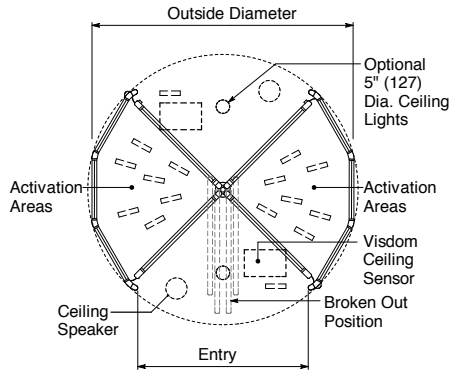

Floor Plan

Segmented® Drum with Round Canopy

Nominal Inside Diameter	Outside Diameter	Canopy Diameter	Entry	Rough Opening Width (at Canopy) x Height
6' 0" (1830)	6' 3 1/2" (1920)	6' 5 7/8" (1978)	3' 10" (1168)	6' 6 3/8" (1991) x 8' 1/4" (2445)
6' 6" (1981)	6' 9 1/2" (2070)	7' 1/8" (2137)	4' 2 3/8" (1280)	7' 5/8" (2149) x 8' 1/4" (2445)
7' 0" (2134)	7' 3 1/2" (2223)	7' 6 1/4" (2292)	4' 6 3/4" (1391)	7' 6 3/4" (2305) x 8' 1/4" (2445)

Overall Unit Height:
8' (2438)

Ceiling Height:
7' (2134)

Canopy Height:
12" (305)

Glazing: Standard door wings prep'd for 1/4" (6) glass. Glass provided by others. Standard drum provided with 7/16" clear laminated curved glass.

Finish:
Anodized, Paint or Clad

Features

- Dual Sensors
- Real Time Clock (RTC) capable of marking individual events



Overall Unit Height:
8' (2438)

Ceiling Height:
7' (2134)

Canopy Height:
12" (305)

Glazing: Standard unit prep'd for 1/4" (6) glass. Glass provided by others.

Finish:
Anodized, Paint or Clad



Horton Automatics
World Headquarters
4242 Baldwin Boulevard
Corpus Christi, Texas 78405-3399 USA
Phone: 800-531-3111, 361-888-5591
Fax: 361-888-6510
www.hortondoors.com

Horton Automatics, Ltd.
United Kingdom
Unit A, Hortonwood 31
Telford, Shropshire, England TF1-7YZ
Phone: 01952 670169
Fax: 01952 670181



A Division of
Overhead Door Corporation