



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

GENERAL INSTALLATION

AUTOMATIC SWING DOORS & OPERATORS - HEAVY DUTY


HD-Swing® Series 4500

Typical Framing and Bottom Pivot


B1.3

Jan 08

Standard Packages

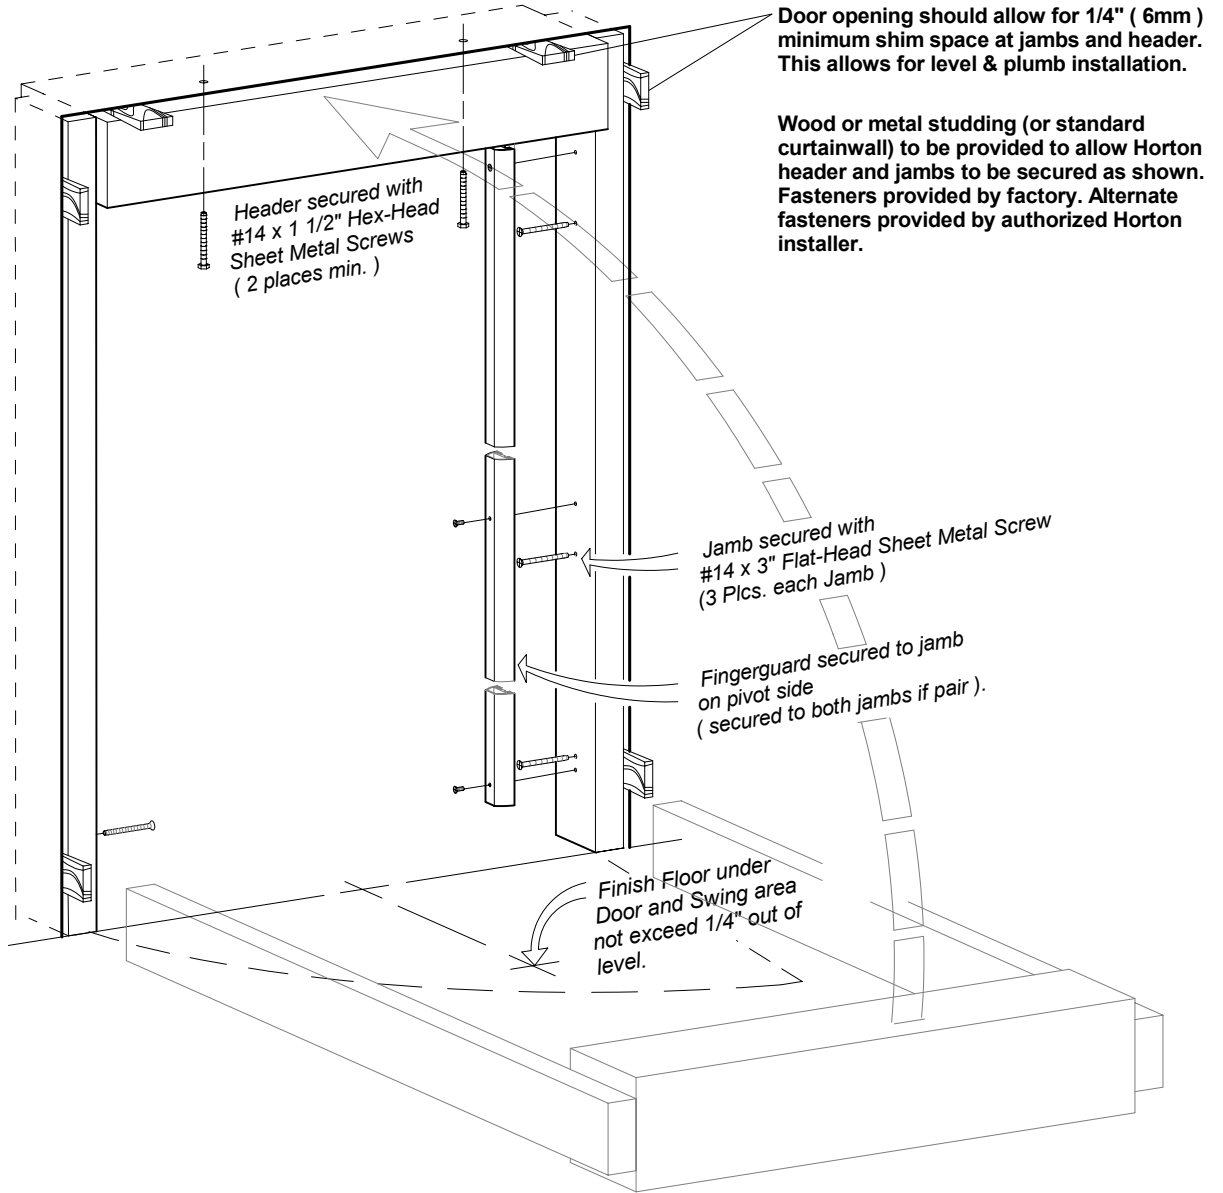


Standard Bottom Pivot with Threshold

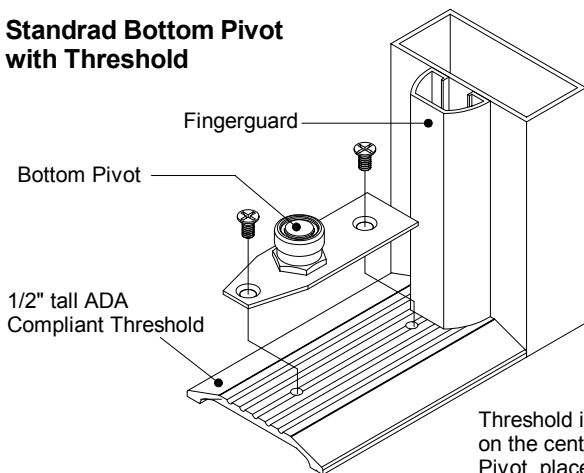

Threshold is positioned against the jamb, on the centerline, and secured to the floor. Pivot, placed against fingerguard, is then secured to threshold.

Non-Threshold Bottom Pivot

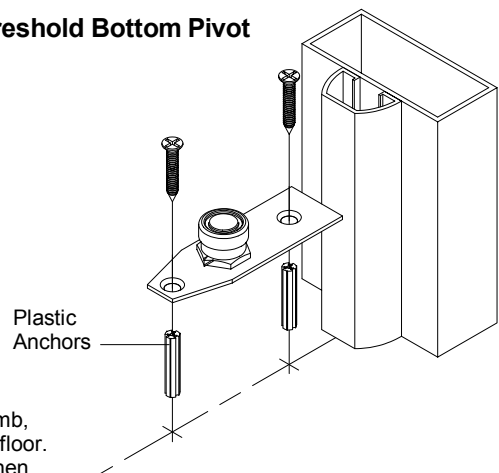

Horton Automatics reserves the right to alter its product and specifications without notice. Dimensions given in U.S. inches followed by millimeters in parenthesis.