



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

SPECIFICATION DETAILS

AUTOMATIC SWING DOORS

Optional Full Access Header for Series 4100 HD-Swing®
 Surface Applied, Single & Pair, Inswing & Outswing

B3.0


July 10

Standard Packages

Single Units		Pair Units	
Types: LH, RH, LHR, RHR		Types: LH-RH, LHR-RHR	
Door Width	Header Width	Door Pair Width	Header Width
3'-0" (914)	3'-3" (991)	5'-0" (1524)	5'-3" (1600)
3'-6" (1067)	3'-9" (1143)	6'-0" (1829)	6'-3" (1905)
		7'-0" (2133)	7'-3" (2210)
Anodized Finish: Clear or Dark Bronze			


Installation and Operation

- Swing door header is surface mounted onto frame and connecting arm assembly is mounted to face of door panel. Frame and door panel to be provided by others.
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each swing door unit on a dedicated 20 amp circuit breaker routed into header. Maximum current draw is 3.15 amps (see page B1.4).
- Unit to be actuated by Vista™ Sensor System (for 1-way traffic). System includes motion sensor, swing-side safety sensor and photo beam mounted beyond the swing of the door (see page B1.5)

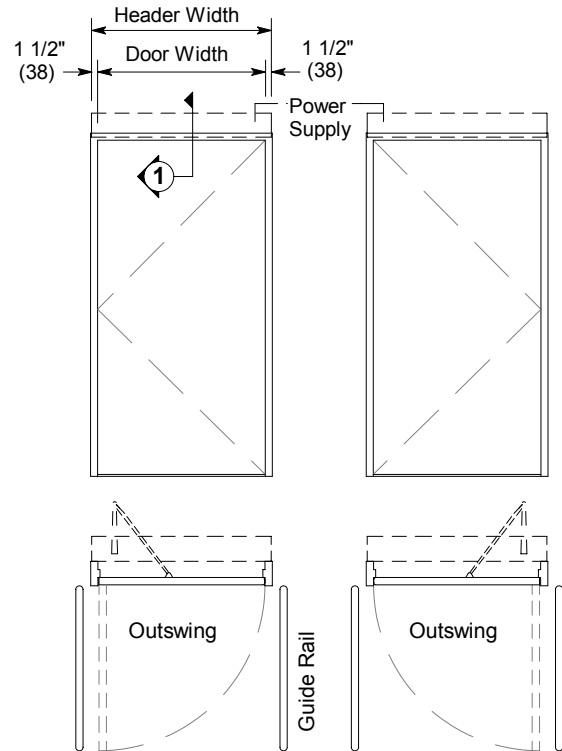


Single Units Floor Plans with Elevations


LHR & RHR shown. LH & RH are Inswing

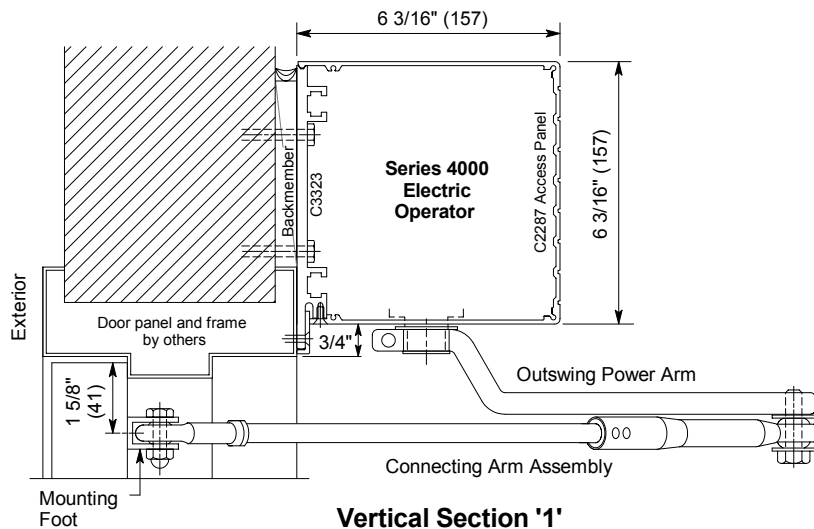

Vertical Section '1'

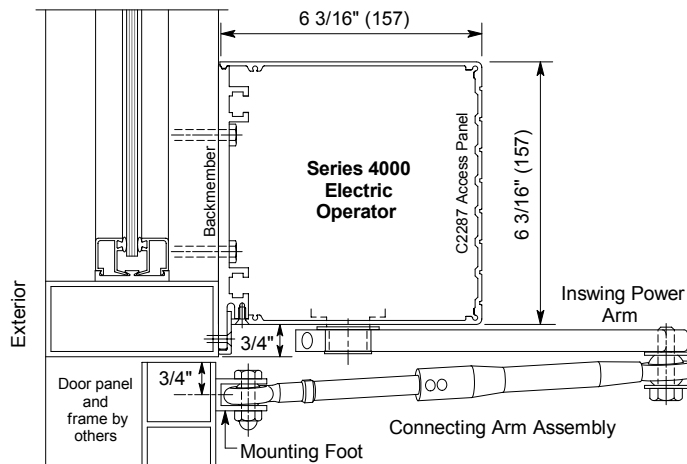

Vertical Section '2'

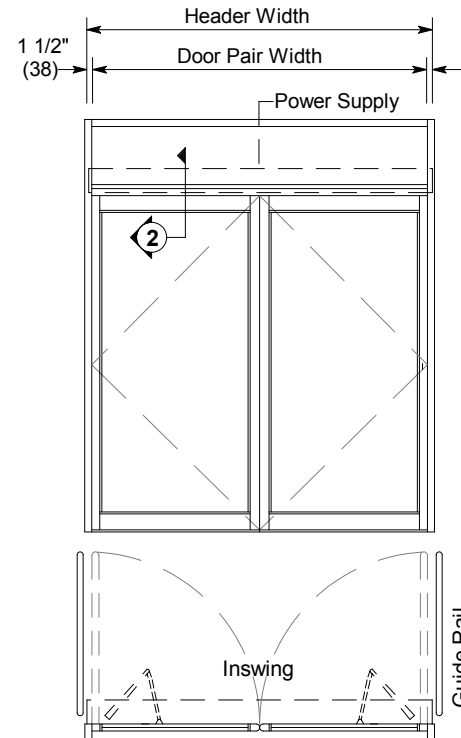

Pair Unit Floor Plan with Elevation

LH-HR shown. LHR-RHR is Outswing