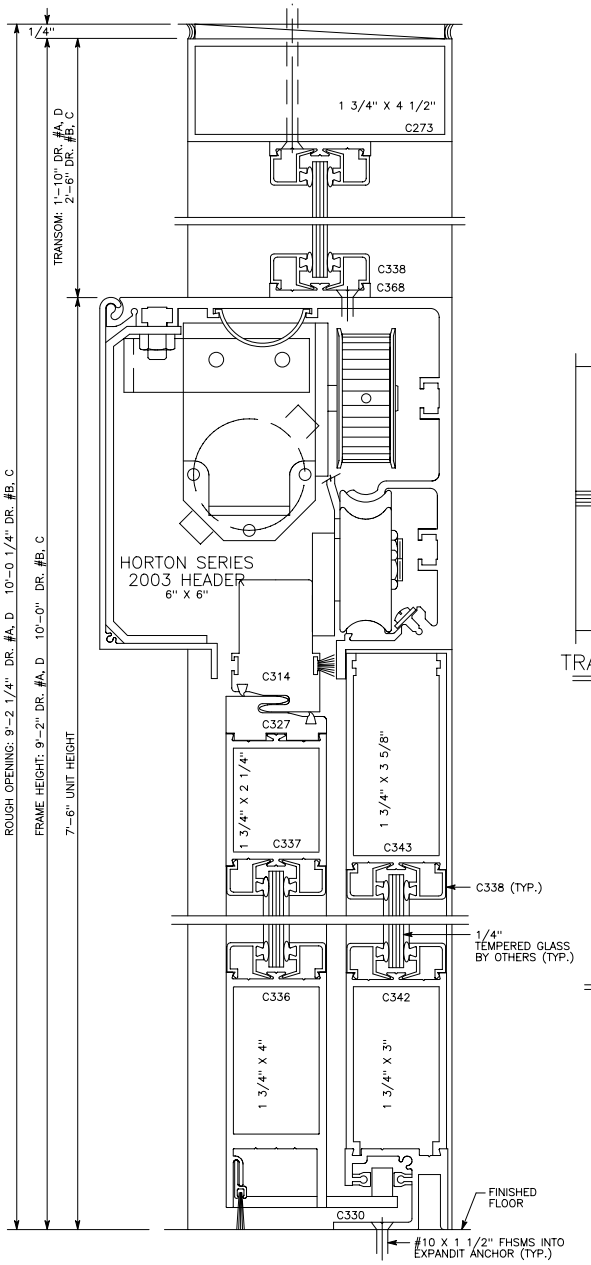

VERTICAL SECTION 5/1

DOOR SHOWN IN OPEN POSITION

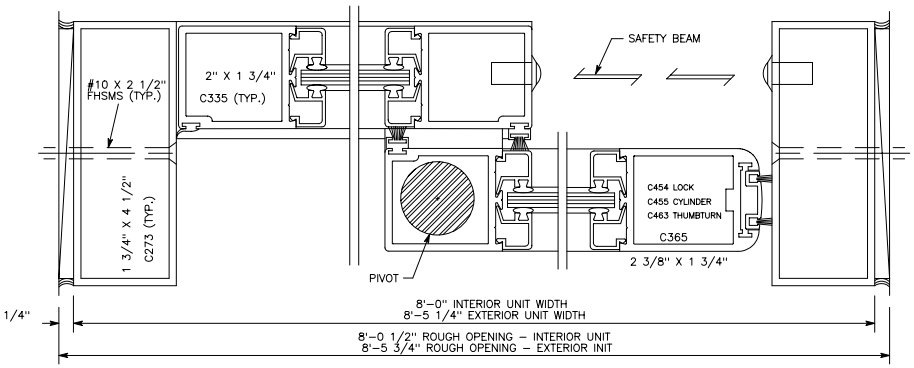

HORIZONTAL SECTION 6/1



TRANSOM VERTICAL 7/1



MUNTIN SECTION 8/1



C3726-1 ROTARY SWITCH 9/1

FIELD MOUNTED ON SIDELITE CLOSEST TO JAMB TUBE, 6'-0" ABOVE FINISH FLOOR

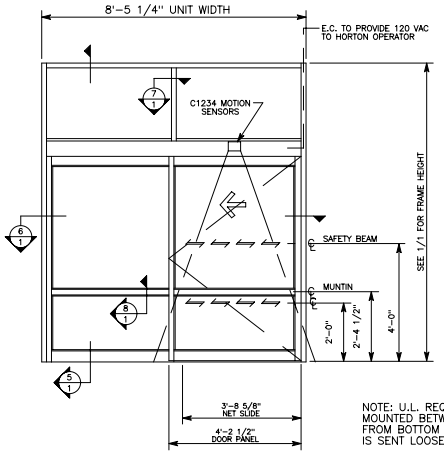

ELEVATION - EXTERIOR 2/1

1 THUS DOOR #A
1 OPPOSITE DOOR #D

NOTE: U.L. REQUIRES PUSH BAR MOUNTED BETWEEN 40 1/4" TO 46" FROM BOTTOM OF DOOR. PUSH BAR IS SENT LOOSE & FIELD MOUNTED.

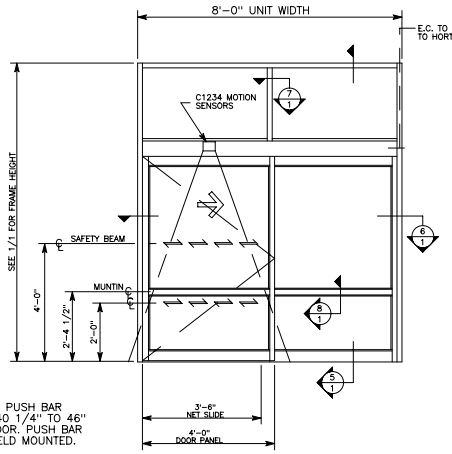

ELEVATION - INTERIOR 4/1

1 THUS DOOR #C
1 OPPOSITE DOOR #B



FLOOR PLAN - EXTERIOR 1/1



FLOOR PLAN - EXTERIOR 3/1

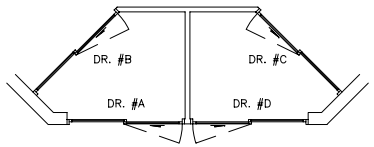

KEY PLAN

BUMPER POST - SET POST SO RUBBER BUMPER RINGS ARE 1 1/2" FROM INSIDE FACE OF FIXED SIDELIGHT FRAME AND PROJECT 1" INTO DOOR OPENING (WHEN FULLY OPEN). -VERIFY SIZE AND LOCATION WITH OWNER.



BUMPER POST AT EXIT DOORS

PACKAGE LIST DR. #A & #B

QTY:	DESCRIPTION
1	SERIES 2003 AUTOMATIC SLIDING DOOR Size: 8'-5 1/4" Wide x 7'-6" High-Door #A 8'-0" Wise x 7'-6"-Door #B Type: O-SX Stile: Narrow
1	TRANSOM WITH 1 VERTICAL
2	C337 2 1/4" HORIZONTAL MUNTIN
2	4" BOTTOM RAIL
1	C3726-1 ROTARY SWITCH
2	C1234 OPTEX MOTION SENSORS
2	C1192 SAFETY BEAMS

PACKAGE LIST DR. #C & #D

QTY:	DESCRIPTION
1	SERIES 2003 AUTOMATIC SLIDING DOOR Size: 8'-0" Wide x 7'-6" High-Door #C 8'-5 1/4" Wide x 7'-6" High-Door #D Type: SX-O Stile: Narrow
1	TRANSOM WITH 1 VERTICAL
2	C337 2 1/4" HORIZONTAL MUNTIN
2	4" BOTTOM RAIL
1	C4320-1 ROCKER SWITCH
2	C1234 OPTEX MOTION SENSORS
2	C1192 SAFETY BEAMS

Please Complete/Verify the Following:

PACKAGE QUANTITY:	
ROUGH OPENING(S):	
FINISH (SELECT ONE):	☐ 313-R1 DARK BRZ. ANOD. ☐ 204-R1 CLEAR ANODIZED
INSTALLATION DATE REQUIRED:	
JOB SUPERINTENDENT:	
JOBSITE PHONE:	

Horton AUTOMATICS
A DIVISION OF OVERHEAD DOOR CORPORATION
4242 Baldwin Boulevard
Corpus Christi, Texas 78405-3399
512-888-5591
800-531-3111
Fax: 512-888-6510
Fax: 800-531-3108
http://www.hortondoors.com

JOB NAME:	ALDI'S
LOCATION:	
DISTRIBUTOR:	
GEN. CONTRACTOR:	
INVOICE NO.:	
CUSTOMER ORDER NO.:	
DATE:	SHEET 1 of 1 | Revision: -